


JOB NAME _____
 ARCHITECT _____
 ENGINEER _____
 CONTRACTOR _____
 LOCATION _____


SUBMITTAL SHEET
 Form Number TUS305.9 Effective Date 11/12
 Replaces TUS305.8




QFV Unit Sizes 2 - 7
COOLING ONLY VARIABLE VOLUME FAN TERMINAL UNIT

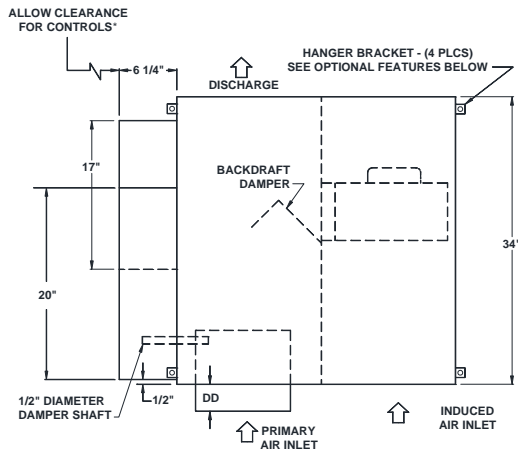

PLAN VIEW - LEFT HAND BOX
 CONTROLS AND SENSORS NOT SHOWN

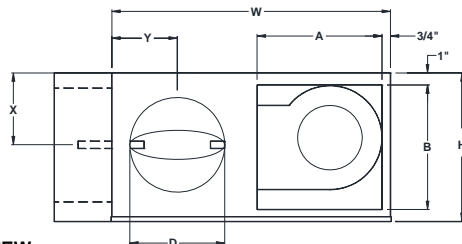

INLET VIEW

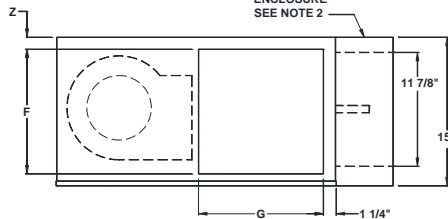

DISCHARGE VIEW

STANDARD FEATURES:

- 22 Ga. galvanized steel construction
- Control enclosure for electronic components
- 1/2" thick dual density fiberglass insulation meeting NFPA 90A and UL 181 safety requirements
- 120V 208V/240V 277V multi-voltage, single speed, single phase, permanently lubricated PSC motors
- Field adjustable fan speed control
- Backdraft damper
- Removable bottom panel allows easy access to all internal components for maintenance
- Four quadrant averaging cross flow sensor
- Discharge requires a flanged duct connection by others
- 24 volt control transformer for electronic controls
- ETL listed; AHRI certified sound ratings

OPTIONAL FEATURES:

- 20 Ga. galvanized steel construction
- Liners:
 - 1" dual density fiberglass insulation
 - 1/2" Foil encapsulated fiberglass insulation
 - 1" Foil encapsulated fiberglass insulation
 - 1/2" Cellular
 - 1" Cellular
- Linear averaging sensor
- Hanger brackets
- Induced air inlet attenuator
- Induced air filter, construction type (Unit Sizes 2-4 15"x15"x1", Unit Sizes 5-7 19"x17"x1")
- Motor disconnect
- Motor fusing
- Dust tight control enclosure

NOTE :

1. Dimensions are given in inches
2. Digital or Analog control enclosure is 20" x 11 7/8", Pneumatic 17" x 15".

*Check NEC for unit clearance requirements

UNIT SIZE	INLET SIZE	HP	W	H	INDUCED AIR		D	DD	DISCHARGE		X	Y	Z
					A	B			F	G			
2	06	1/10	29	15	13	13	5 7/8	4 7/8	11 1/2	11 1/2	7 1/2	6 7/8	1 3/4
2	08	1/10	29	15	13	13	7 7/8	4 7/8	11 1/2	11 1/2	7 1/2	6 7/8	1 3/4
3	08	1/10	29	15	13	13	7 7/8	4 7/8	11 1/2	11 1/2	7 1/2	6 7/8	1 3/4
3	10	1/10	29	15	13	13	9 7/8	4 7/8	11 1/2	11 1/2	7 1/2	6 7/8	1 3/4
4	10	1/4	29	15	13	13	9 7/8	4 7/8	11 1/2	11 1/2	7 1/2	6 7/8	1 3/4
4	12	1/4	29	15	13	13	11 7/8	6 7/8	11 1/2	11 1/2	7 1/2	6 7/8	1 3/4
5	12	1/2	37	17 3/4	17	15 3/4	11 7/8	6 7/8	14	15 1/2	8 7/8	9	1 7/8
5	14	1/2	37	17 3/4	17	15 3/4	13 7/8	6 7/8	14	15 1/2	8 7/8	9	1 7/8
6	14	1/2	37	17 3/4	17	15 3/4	13 7/8	6 7/8	14	15 1/2	8 7/8	9	1 7/8
6	16	1/2	37	17 3/4	17	15 3/4	15 7/8	6 7/8	14	15 1/2	8 7/8	9	1 7/8
7	16	3/4	37	17 3/4	17	15 3/4	15 7/8	6 7/8	14	15 1/2	8 7/8	9	1 7/8