

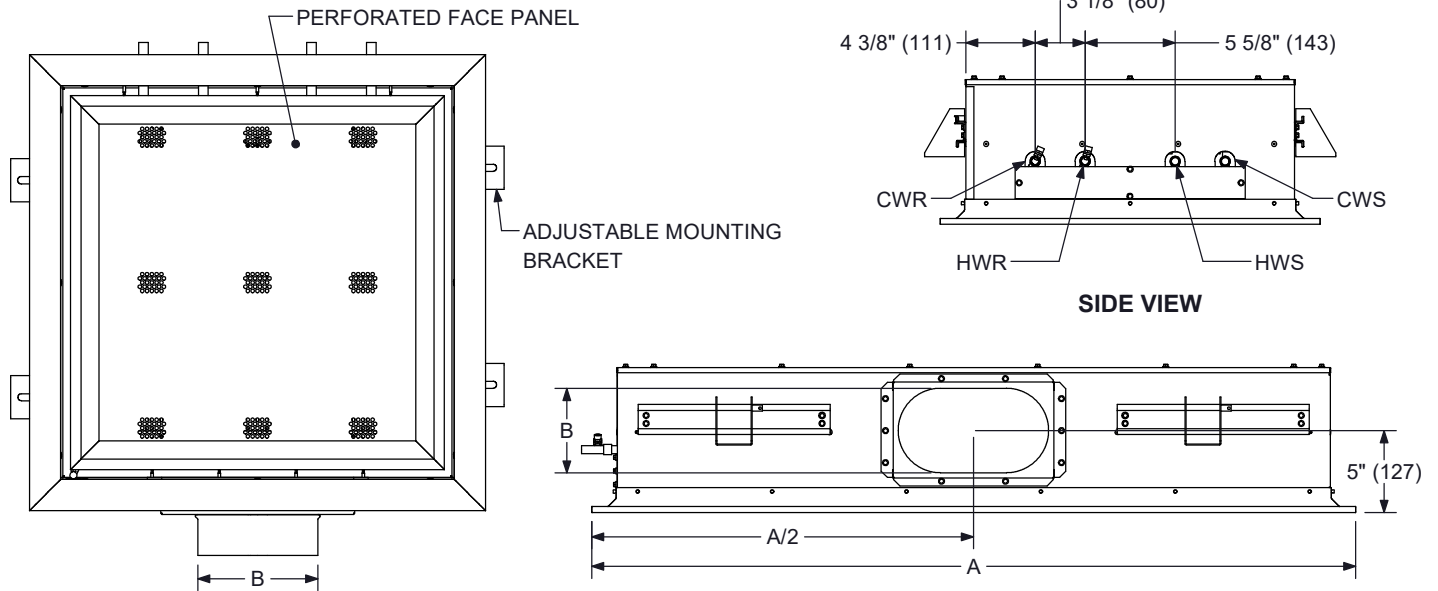



SIDE INLET



TOP INLET

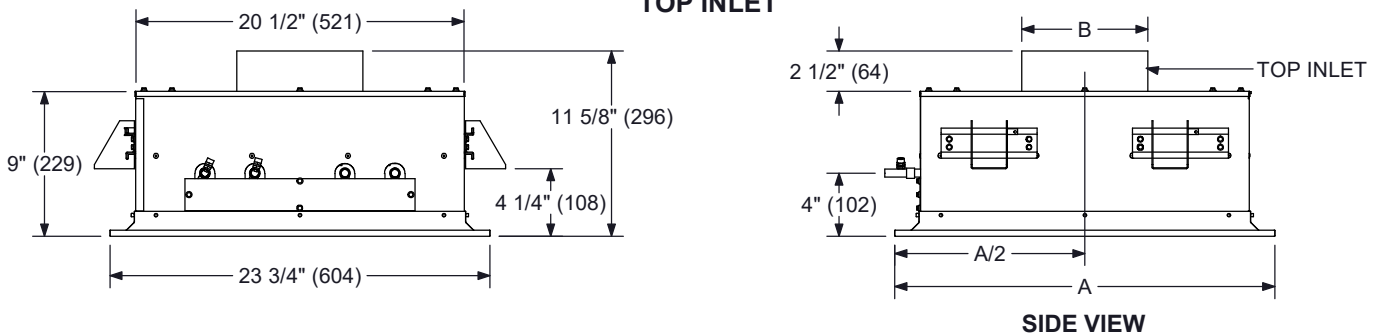

LTF FRAME



NTG FRAME

MODEL SIZE	BORDER TYPE	
	LTF	NTG
	A	A
24 X 24	23 3/4 (604)	23 3/8 (594)
24 X 48	47 3/4 (1213)	47 3/8 (1204)

NOMINAL INLET	B
4 ROUND	3 7/8 (98)
5 ROUND	4 7/8 (124)
6 ROUND	5 7/8 (149)
6 OVAL	5 1/4 (133) X 6 1/2 (165)
8 ROUND	7 7/8 (200)
8 OVAL	5 1/4 (133) X 9 1/2 (241)

DESCRIPTION:

- 24" WIDE, MODULAR ACTIVE CHILLED BEAM DIFFUSER, AVAILABLE IN 4-WAY AIR PATTERN.
- EXTRUDED ALUMINUM AND GALVANEAL G90, 20 GAUGE SHEET METAL. MECHANICALLY SEALED, LEAK RESISTANT CONSTRUCTION.
- RETURN FACE PANEL IS SECURED WITH 1/4-TURN FASTENER, TO PROVIDE ACCESS TO INTERNAL COMPONENTS.
- INLET SIZES 6" AND 8" ARE ROUND FOR TOP INLET AND OVAL FOR SIDE INLET CONFIGURATIONS.
- RAILS WITH ADJUSTABLE MOUNTING BRACKETS PROVIDED IN 4 LOCATIONS FOR MOUNTING.
- EXTERIOR FACE, BORDER ELEMENTS AND VISIBLE INTERNAL COMPONENTS ARE PAINTED TO MATCH ORDERED FINISH. PAINT IS POWDER COAT, A MIX OF POLYESTER AND EPOXY.
- COIL COMES STANDARD WITH AIR VENT & COIL DRAIN.

DIMENSIONS ARE GIVEN AS INCHES (MM)



KRUEGER

BAM


CHILLED BEAM- ACTIVE MODULAR

JOB NAME _____
ENGINEER _____
CONTRACTOR _____
TAG _____


SUBMITTAL SHEET

TOP VIEW


24T, 4 PIPE TOP INLET

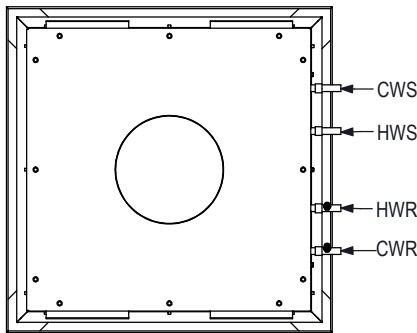


24A, 4 PIPE SIDE INLET

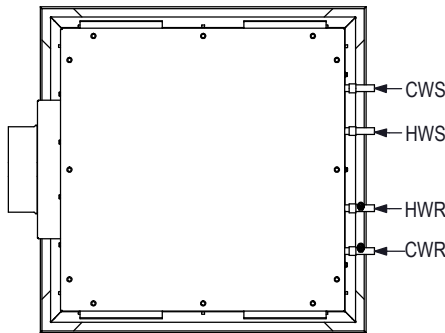


24A, 2 PIPE SIDE INLET

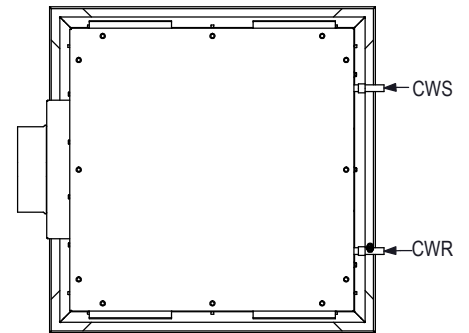


24T, 2 PIPE TOP INLET

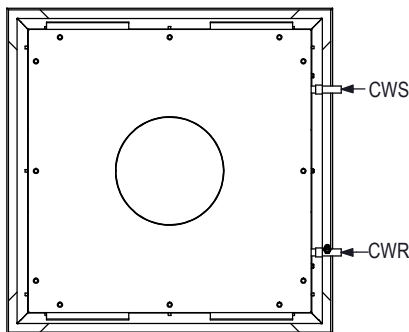

48L, 4 PIPE LEFT HAND, SIDE INLET

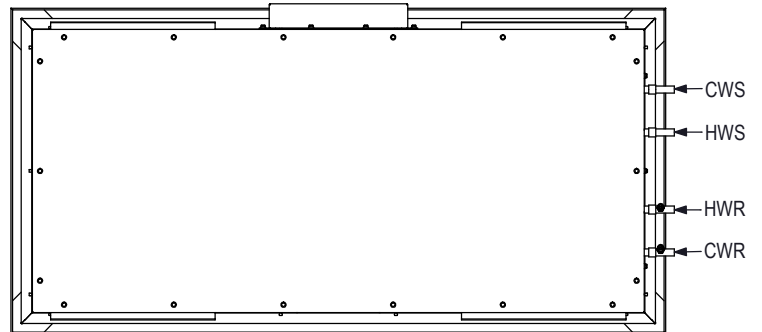

48R, 4 PIPE RIGHT HAND, SIDE INLET

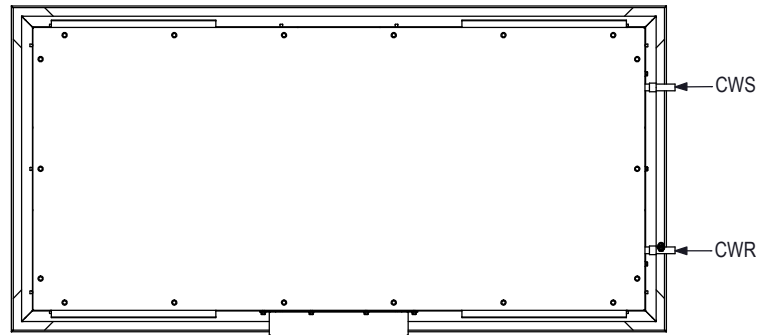

CONFIGURATION OPTIONS:

MODULE SIZE & INLET LOCATION

- ☐ 24T - 24"X24", TOP INLET
- ☐ 24A - 24"X24", SIDE INLET
- ☐ 48T - 48"X24", TOP INLET
- ☐ 48L - 48"X24", LEFT SIDE INLET
- ☐ 48R - 48"X24", RIGHT SIDE INLET

FRAME

- ☐ LTF - 15/16" TEE
- ☐ NTG - NARROW TEE (9/16")

FINISH

- ☐ WHT - BRITISH WHITE
- ☐ BLK - BLACK

NOZZLE CONFIGURATION

- ☐ M13
- ☐ M17
- ☐ M23
- ☐ M31

INLET SIZE

- ☐ 4" - 4" ROUND
- ☐ 5" - 5" ROUND
- ☐ 6" - 6" ROUND TOP/OVAL SIDE
- ☐ 8" - 8" ROUND TOP/OVAL SIDE

PIPING CONNECTION

- ☐ SWT - SWEAT (STANDARD)
- ☐ MPT - 1/2" MALE PIPE THREAD
- ☐ 3PT - 3/4" MALE PIPE THREAD

COIL TYPE

- ☐ 2P1C - 2 PIPE COIL- 1 CIRCUIT
- ☐ 4P1C - 4 PIPE COIL- 1 CIRCUIT

ACCESSORIES

- ☐ I - INTERNAL CLOSED CELL INSULATION
- ☐ LS - LINT SCREEN
- ☐ BHK - BEAM HOSE KIT (REQUIRES MPT)*
- ☐ BFR - BEAM FLOW REGULATOR*

*ORDERED SEPARATELY. SEE CB71-ACC-00.

DIMENSIONS ARE GIVEN AS INCHES (MM)

Revision Date: 05/15/2026

Form: CB21-BAM-00

Replaces: NEW SUBMITTAL

Product Information is Subject to Change Without Notice