


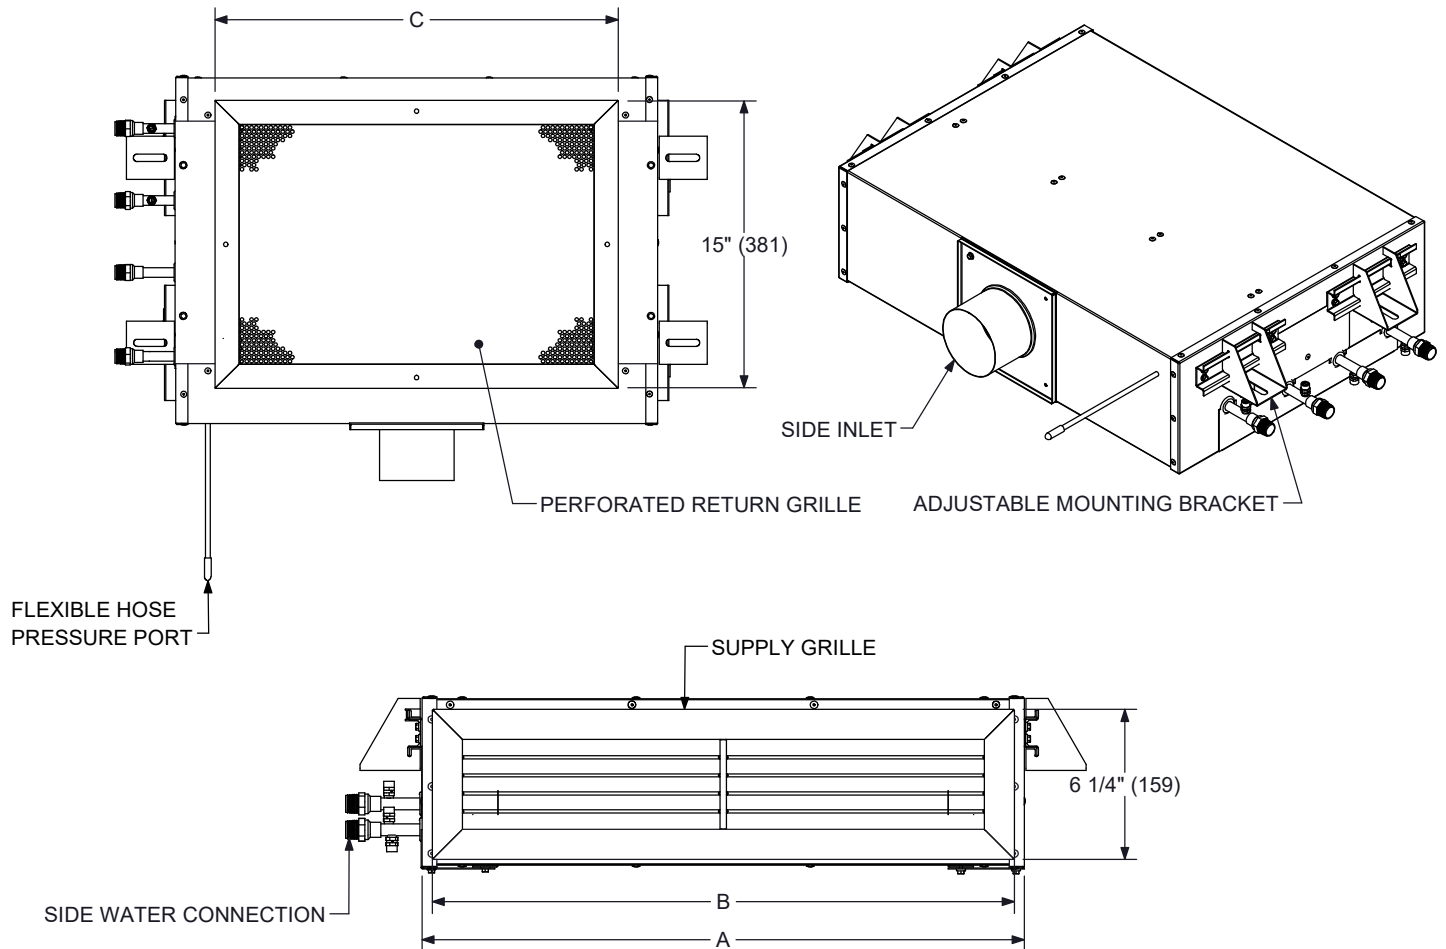

NOMINAL LENGTH	A	B	C
2 FT	25 1/8 (638)	24 1/4 (616)	21 (534)
3 FT	37 1/8 (943)	36 1/4 (921)	33 (838)
4 FT	49 1/8 (1248)	48 1/4 (1226)	45 (1143)
5 FT	61 1/8 (1553)	60 1/4 (1531)	57 (1448)
6 FT	73 1/8 (1858)	72 1/4 (1835)	69 (1753)

DESCRIPTION:

- CONCEALED BULKHEAD/CORNER MOUNTED ACTIVE CHILLED BEAM DIFFUSER, AVAILABLE IN 1-WAY AIR PATTERN.
- GALVANEALD G90, 20 GAUGE SHEET METAL. MECHANICALLY SEALED, LEAK RESISTANT CONSTRUCTION.
- PERFORATED RETURN FACE PANEL IS REMOVABLE TO PROVIDE ACCESS TO INTERNAL COMPONENTS.
- INLET SIZES 4" AND 5" ARE ROUND AND 6" AND 8" ARE OVAL FOR SIDE INLET CONFIGURATIONS.
- RAILS WITH ADJUSTABLE MOUNTING BRACKETS PROVIDED IN 4 LOCATIONS FOR MOUNTING.
- DESIGNED WITH SHALLOW PROFILE FOR LOW HEIGHT CONSTRUCTION AND RETROFIT PROJECTS.
- COIL COMES STANDARD WITH AIR VENT.
- OPTIONAL SUPPLY GRILLE IS KRUEGER MODEL AF80, NOMINAL LENGTH DEPENDENT ON BEAM LENGTH.
- OPTIONAL RETURN GRILLE IS KRUEGER MODEL S80P, NOMINAL LENGTH DEPENDENT ON BEAM LENGTH.


DIMENSIONS ARE GIVEN AS INCHES (MM)

Revision Date: 5/15/2026


Form: CB41-BAB-00

Replaces: NEW SUBMITTAL

Product Information is Subject to Change Without Notice

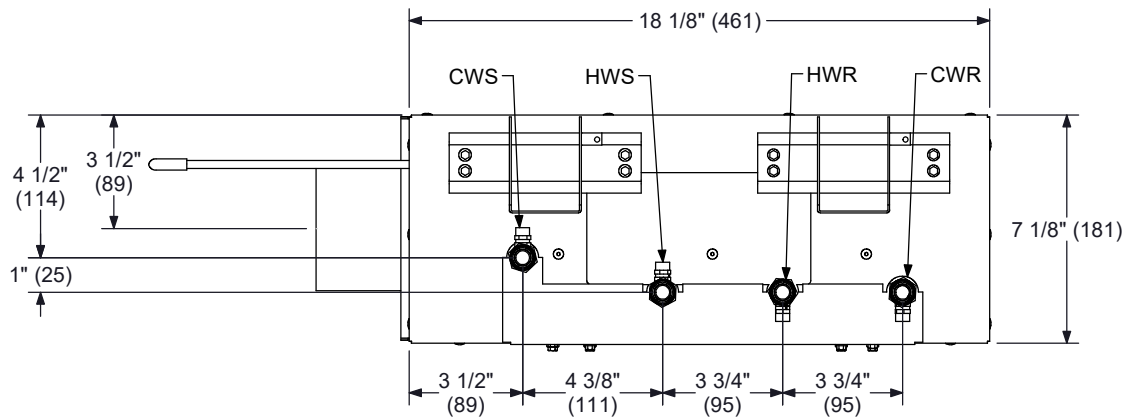

4 PIPE, RIGHT HAND, 2 FT LENGTH SHOWN

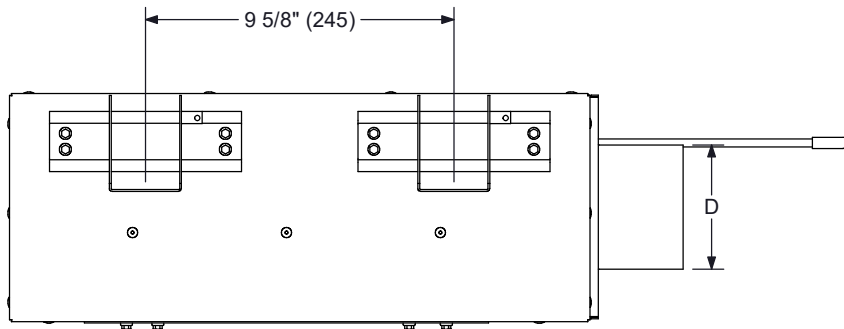

INLET	D
4 ROUND	3 7/8 (99)
5 ROUND	4 7/8 (124)
6 OVAL	5 1/4 (134) X 6 1/4 (159)
8 OVAL	5 1/4 (134) X 9 3/8 (238)

CONFIGURATION OPTIONS:

LENGTH

- ☐ 2 - 2 FT
- ☐ 3 - 3 FT
- ☐ 4 - 4 FT
- ☐ 5 - 5 FT
- ☐ 6 - 6 FT

SUPPLY GRILLE

- ☐ 0 - NONE
- ☐ L1 - LOUVERED GRILLE (AF80)

RETURN GRILLE

- ☐ 0 - NONE
- ☐ CP - CIRCULAR PERFORATED FACE (S80P)

NOZZLE CONFIGURATION

- ☐ M13
- ☐ M17
- ☐ M23
- ☐ M31

INLET SIZE

- ☐ 4" - 4" ROUND
- ☐ 5" - 5" ROUND
- ☐ 6" - 6" OVAL
- ☐ 8" - 8" OVAL

PIPING CONNECTION

- ☐ SWT - SWEAT (STANDARD)
- ☐ MPT - 1/2" MALE PIPE THREAD
- ☐ 3PT - 3/4" MALE PIPE THREAD

COIL TYPE

- ☐ 2P1C - 2 PIPE COIL- 1 CIRCUIT
- ☐ 2P2C - 2 PIPE COIL- 2 CIRCUIT
- ☐ 4P1C - 4 PIPE COIL- 1 CIRCUIT
- ☐ 4P2C - 4 PIPE COIL- 2 CIRCUIT

COIL ACCESSORY

- ☐ D - COIL DRAIN

ACCESSORIES

- ☐ I - INTERNAL CLOSED CELL INSULATION
- ☐ BHK - BEAM HOSE KIT (REQUIRES MPT)*
- ☐ BFR - BEAM FLOW REGULATOR*

*ORDERED SEPARATELY. SEE **CB71-ACC-00**.

DIMENSIONS ARE GIVEN AS INCHES (MM)