


JOB NAME _____
 ARCHITECT _____
 ENGINEER _____
 CONTRACTOR _____
 LOCATION _____

SUBMITTALSHEET
 Form Number SG7019-1 Effective Date 2/13
 Replaces FORM SG7019



1340 SERIES

Steel Lattice Pattern Deflection Diffuser Minimum Security

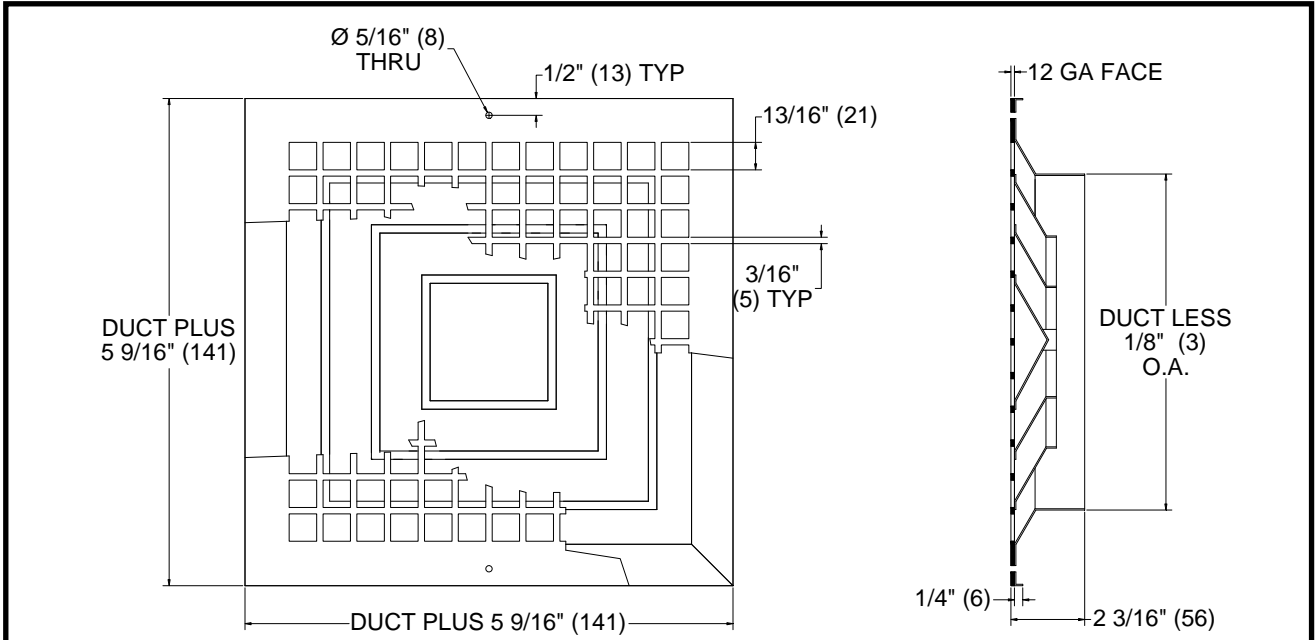

FACE VIEW


CROSS SECTION

STANDARD FEATURES :

- FACE PLATE :** 12 ga steel with 13/16" x 13/16" (21 x 21) square holes and 3/16" (5) wide frets.
- DIFFUSER :** Steel 'SH' frame 22 surface mount construction. See pattern chart.
- FINISH :** 44 British White
- SIZES** available in 3" (76) increments only.
 DUCT MIN 6" (152) x 6" (152)
 MAX 24" (610) x 24" (610)
- SECURITY SCREWS:** supplied by others

MINIMUM CEILING OPENING
 DUCT SIZE PLUS 3 1/2" (89)
 DUCT LESS 1/4" (6)

INSTALLATION DETAIL



OPTIONS :

- OBD :** duct mounted opposed blade damper

SCREW HOLE DETAIL PER SIDE

NECK SIZE	LOCATION & NUMBER OF HOLES
6" ONLY	ONE HOLE AT CENTER LINE
9" TO 18"	TWO HOLES 3" FROM EDGE
21" TO 24"	THREE HOLES : ONE AT CENTER TWO 3" FROM EDGE

DIMENSIONS ARE AS INCHES (MM).

